

ALCOTEST 9510 PARAMETER REPORT

Equipment

Serial No.: ARMK-0008
Firmware: 8326739 1.5
WinCE application: 8326738 2.9
Configuration: 8326737 3.10

Date: 02/05/2026
Time: 07:04:20

Parameter

| | | |
|---|--------|-------------|
| min. blow time | 5.0 | s |
| min. breath volume for females of age 60+ | 1.2 | L |
| min. breath volume for all other | 1.5 | L |
| min. blow flow | 4.5 | L/min |
| plateau detection limit | 4 | % |
| plateau detection start conc. | 70 | microgram/L |
| neg. flow detection (part. vacuum) | 10.0 | hPa |
| neg. flow detection sensitivity | 10 | |
| cal. gas abort volume | 0.4 | L |
| result-to-zero limit | 0.0050 | %BAC |
| ambient air check limit | 0.0049 | %BAC |
| interference det. d-criterion limit abs. | 38 | microgram/L |
| interference det. d-criterion limit rel. | 10.0 | % |
| interference det. t-criterion limit abs. | 8 | microgram/L |
| interference det. t-criterion limit rel. | 2.1 | % |
| IR CO2 offset | 10 | microgram/L |
| IR H2O offset | 4 | microgram/L |
| EC H2O offset | 0 | microgram/L |
| Value-based EC aging comp. on/off (1/0) | 0 | |
| Time-based EC aging comp. on/off (1/0) | 1 | |
| Time-based EC aging comp. per month | 0.2 | % |
| Time-based EC aging comp. maximum | 3.0 | % |
| EC fatigue comp. max. sum | 15000 | |
| EC fatigue comp. factor | 50 | |
| EC fatigue comp. minutes | 180 | |
| mouth alc. mark limit | 500 | |
| mouth alc. lower limit | 30 | |
| mouth alc. slope | 6 | |
| mouth alc. zero limit | 50 | |
| mouth alc. max. neg. sum | 6 | |
| mouth alc. max. 2nd derivative | 35 | |

ALCOTEST 9510 CERTIFICATION REPORT - WET ADJUST (PART I)
Barnegat Township

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMK-0008
Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9

Wet Adjust Record

Wet Adjust File No.: 257 Wet Adjust Date: 02/05/2026 Wet Adjust No.: 7
Wet Adjust Time: 07:44:53

Concentration: 0.100 %
Adjusting Unit: X-Cal 2000 Adj. Unit Ser. No.: ARRC-0011 Adj. Unit Exp.: 08/19/2026
Solution Lot No.: 24210 Soln. Bottle No.: 992 Adjust Soln. Exp.: 06/11/2026

Preadjust Simulator Temp.: 34.00 degree C
Postadjust Simulator Temp.: 34.01 degree C

Result

Procedure completed successfully.

Coordinator

Last Name: Bellay - First Name: David MI: M. Badge No.: 8112

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.



Signed:

Date: 02/05/2026

ID: 50

ALCOTEST 9510 CERTIFICATION REPORT - DRY ADJUST (PART II)
Barnegat Township

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMK-0008
Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9

Dry Adjust Record

Dry Adjust File No.: 258 Dry Adjust Date: 02/05/2026 Dry Adjust No.: 7
Dry Adjust Time: 08:02:53

Concentration: 0.100 %
Dry Gas Lot No.: 302-402755160 Adjust Gas Exp.: 05/24/2026
Barom. Model No.: Mensor CPG2300 Barom. Serial No.: 41001275 Barom. Cert. Exp.: 08/23/2026
Pre-adjust Amb. Pressure: 1012 hPa Post-adjust Amb. Pressure: 1015 hPa

Result

Procedure completed successfully.

Coordinator

Last Name: Bellay - First Name: David MI: M. Badge No.: 8112

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.



Signed:

Date: 02/05/2026

ID: 50

ALCOTEST 9510 CERTIFICATION REPORT - LINEARITY (PART III)
Barnegat Township

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMK-0008
Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9

Linearity Record

Linearity File No.: 259 Lin. Date: 02/05/2026 Lin. No.: 7

0.040% Dry Gas Lot No.: 302-402730318 Adjust. Gas Exp.: 04/27/2026
0.080% Dry Gas Lot No.: 302-402732434 Adjust. Gas Exp.: 04/28/2026
0.160% Dry Gas Lot No.: 302-402922401 Adjust. Gas Exp.: 12/14/2026
0.300% Dry Gas Lot No.: 302-402755077 Adjust. Gas Exp.: 05/26/2026

Data Summary

| Function | Result %BAC | Time hh:mm:ss | Barometric Pres. [hPa] | Comment(s) or Status Code |
|-----------------------|-------------|---------------|------------------------|---------------------------|
| Ambient Air Blank | 0.000 | 08:32:20 | | *TEST PASSED* |
| Control .04 Test 1 EC | 0.040 | 08:32:55 | 1015 | *TEST PASSED* |
| Control .04 Test 1 IR | 0.040 | 08:32:55 | 1015 | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 08:33:50 | | *TEST PASSED* |
| Control .04 Test 2 EC | 0.040 | 08:34:02 | 1015 | *TEST PASSED* |
| Control .04 Test 2 IR | 0.040 | 08:34:02 | 1015 | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 08:37:00 | | *TEST PASSED* |
| Control .08 Test 3 EC | 0.079 | 08:37:36 | 1015 | *TEST PASSED* |
| Control .08 Test 3 IR | 0.080 | 08:37:36 | 1015 | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 08:38:37 | | *TEST PASSED* |
| Control .08 Test 4 EC | 0.080 | 08:38:50 | 1015 | *TEST PASSED* |
| Control .08 Test 4 IR | 0.080 | 08:38:50 | 1015 | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 08:41:52 | | *TEST PASSED* |
| Control .16 Test 5 EC | 0.157 | 08:42:31 | 1015 | *TEST PASSED* |
| Control .16 Test 5 IR | 0.158 | 08:42:31 | 1015 | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 08:43:38 | | *TEST PASSED* |
| Control .16 Test 6 EC | 0.160 | 08:43:53 | 1015 | *TEST PASSED* |
| Control .16 Test 6 IR | 0.159 | 08:43:53 | 1015 | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 08:50:20 | | *TEST PASSED* |
| Control .30 Test 7 EC | 0.302 | 08:50:56 | 1015 | *TEST PASSED* |
| Control .30 Test 7 IR | 0.304 | 08:50:56 | 1015 | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 08:52:10 | | *TEST PASSED* |
| Control .30 Test 8 EC | 0.305 | 08:52:23 | 1015 | *TEST PASSED* |
| Control .30 Test 8 IR | 0.306 | 08:52:23 | 1015 | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 08:52:48 | | *TEST PASSED* |

Result

All tests within acceptable tolerance.

Coordinator

Last Name: Bellay - First Name: David MI: M. Badge No.: 8112

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.



Signed:

Date: 02/05/2026

ID: 50

ALCOTEST 9510 CYLINDER INSTALLATION REPORT - INLET 1
Barnegat Township
SERIAL NUMBER: ARMK-0008

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMK-0008
 Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9
 Cyl1 Install File No.: 260 Cyl1 Install Date: 02/05/2026 Cyl1 Install No.: 5

Control Tests (0.100%)

Installation Inlet: #1 (Upper) Post test active Cyl.: #2 (Lower)
 Dry Gas Lot No.: 302-403368144 Dry Gas Lot Exp.: 06/13/2028

Data Summary

| Function | Result %BAC | Time hh:mm:ss | Barometric Pres. [hPa] | Comment(s) or Status Code |
|-------------------|-------------|---------------|------------------------|---------------------------|
| Ambient Air Blank | 0.000 | 09:05:32 | | *TEST PASSED* |
| Control Test 1 | | | 1015 | *TEST PASSED* |
| EC Result | 0.102 | 09:06:19 | | *TEST PASSED* |
| IR Result | 0.102 | 09:06:19 | | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 09:07:23 | | *TEST PASSED* |
| Control Test 2 | | | 1015 | *TEST PASSED* |
| EC Result | 0.102 | 09:07:48 | | *TEST PASSED* |
| IR Result | 0.102 | 09:07:48 | | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 09:08:52 | | *TEST PASSED* |
| Control Test 3 | | | 1015 | *TEST PASSED* |
| EC Result | 0.103 | 09:09:18 | | *TEST PASSED* |
| IR Result | 0.102 | 09:09:18 | | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 09:09:41 | | *TEST PASSED* |

Result

All tests within acceptable tolerance.

Coordinator

Last Name: Bellay - First Name: David MI: M. Badge No.: 8112

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.



Signed:

Date: 02/05/2026

ID: 50

ALCOTEST 9510 CYLINDER INSTALLATION REPORT - INLET 2
Barnegat Township
SERIAL NUMBER: ARMK-0008

Equipment

Inst. Model No.: ALCOTEST 9510 Serial No.: ARMK-0008
 Firmware: 8326739 1.5 Config.: 8326737 3.10 WinCE: 8326738 2.9
 Cyl2 Install File No.: 220 Cyl2 Install Date: 09/03/2025 Cyl2 Install No.: 4

Control Tests (0.100%)

Installation Inlet: #2 (Lower) Post test active Cyl.: #1 (Upper)
 Dry Gas Lot No.: 302-403035121 Dry Gas Lot Exp.: 05/02/2027

Data Summary

| Function | Result %BAC | Time hh:mm:ss | Barometric Pres. [hPa] | Comment(s) or Status Code |
|-------------------|-------------|---------------|------------------------|---------------------------|
| Ambient Air Blank | 0.000 | 09:10:05 | | *TEST PASSED* |
| Control Test 1 | | | 1009 | *TEST PASSED* |
| EC Result | 0.100 | 09:10:51 | | *TEST PASSED* |
| IR Result | 0.101 | 09:10:51 | | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 09:11:42 | | *TEST PASSED* |
| Control Test 2 | | | 1009 | *TEST PASSED* |
| EC Result | 0.101 | 09:12:07 | | *TEST PASSED* |
| IR Result | 0.101 | 09:12:07 | | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 09:12:59 | | *TEST PASSED* |
| Control Test 3 | | | 1009 | *TEST PASSED* |
| EC Result | 0.101 | 09:13:24 | | *TEST PASSED* |
| IR Result | 0.102 | 09:13:24 | | *TEST PASSED* |
| Ambient Air Blank | 0.000 | 09:13:34 | | *TEST PASSED* |

Result

All tests within acceptable tolerance.

Coordinator

Last Name: Bellay - First Name: David MI: M. Badge No.: 8112

On this date, I certified the above instrument in accordance with the Alcotest 9510 operator training and procedures established by the NJSP Office of Forensic Sciences.



Signed:

Date: 09/03/2025

ID: 50

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401036
DRAEGER MEDICAL SYSTEMS INC

Sales order: 1140199442
Date: June 18, 2025

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater.
CALGAZ LOT#: 302-403368144
ETHANOL IN NITROGEN

Manufactured Date: June 13, 2025
Product Expiration: June 13, 2028

| COMPONENT | PPM | (BrAC) |
|--------------------------|----------|----------|
| ETHANOL | 260.5PPM | (0.100) |
| NITROGEN | BAL | |
| AVERAGE ANALYTICAL VALUE | PPM | (BrAC) |
| ETHANOL | 262.7 | (0.101) |

| REFERENCE STANDARD | CYLINDER | CONCENTRATION PPM |
|-----------------------------|----------|-------------------|
| N.M.I. TRACEABLE STANDARDS* | ND49826 | 260.1 |

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.
Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.
Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY: _____



"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401036
DRAEGER MEDICAL SYSTEMS INC

Sales order: 1130435101
Date: May 28, 2024

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater.
CALGAZ LOT#: 302-403035121
ETHANOL IN NITROGEN

Manufactured Date: May 02, 2024
Product Expiration: May 02, 2027

| COMPONENT | PPM | (BrAC) |
|--------------------------|----------|----------|
| ETHANOL | 260.5PPM | (0.100) |
| NITROGEN | BAL | |
| AVERAGE ANALYTICAL VALUE | PPM | (BrAC) |
| ETHANOL | 263.0 | (0.101) |

| REFERENCE STANDARD | CYLINDER | CONCENTRATION PPM |
|-----------------------------|----------|-------------------|
| N.M.I. TRACEABLE STANDARDS* | ND28529 | 103.7 |

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.


Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

APPROVED BY:

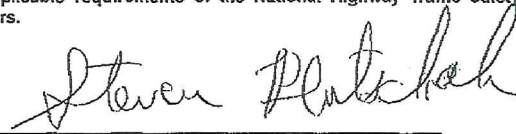

"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400 Fax: (410) 228-4251



Dräger

Alcotest 9510

CERTIFICATE OF ACCURACY

This is to certify that the Alcotest 9510 has been tested for accuracy and found to be in compliance with the National Highway Traffic Safety Administration Standard for evidential breath testing devices. The Alcotest 9510 is compliant as a "mobile" and "nonmobile" EBT with 49 FR 48854, 49 FR 48864, and 58 FR 48705. The manufacturer recommends accuracy verification of this instrument within 12 months of the calibration date below, or sooner, according to your state's specifications.

Certification Date: ✓

Serial Number:

8/25/2029

ARMK-0008

Dräger, Inc.

QR

LN



State of New Jersey

OFFICE OF THE ATTORNEY GENERAL
DEPARTMENT OF LAW AND PUBLIC SAFETY
DIVISION OF STATE POLICE
POST OFFICE BOX 7068
WEST TRENTON, NJ 08628-0068
(609) 882-2000

PHILIP D. MURPHY
Governor

TAHESHA L. WAY
Lt. Governor

MATTHEW J. PLATKIN
Attorney General

COLONEL PATRICK J. CALLAHAN
Superintendent

CERTIFICATION OF ANALYSIS 0.100 PERCENT BREATH ALCOHOL SIMULATOR SOLUTION

ACCEPTANCE SPECIFICATIONS FOR BREATH ALCOHOL SIMULATOR SOLUTION: Ethyl alcohol concentration within, but not exceeding, the range of 0.1174 to 0.1246 grams per 100 milliliters of solution.

MANUFACTURER: Draeger, Inc.

ANALYSIS DATE: 07/18/2024

BREATH ALCOHOL SIMULATOR SOLUTION LOT NUMBER: 24210

Representative samples of the above-referenced Lot Number were tested by Gas Chromatography and found to have a mean ethyl alcohol concentration range of 0.1195 to 0.1217 grams per 100 milliliters of solution.

This lot of breath alcohol simulator solution may be utilized as a known traceable standard for the purpose of conducting periodic tests, pursuant to N.J.A.C. 13:51-4.3, of approved breath test instruments (N.J.A.C. 13:51-3.5) utilized by law enforcement agencies in this State. The manufacturer's expiration date for this lot of breath alcohol simulator solution is June 11, 2026.

As OFS Director for the Division of State Police, I hereby certify and attest that the tests and results documented in this Certificate of Analysis were performed at the Office of Forensic Sciences of the Division of State Police on properly functioning and calibrated instruments and equipment. All procedures utilized are accurate, objective, and performed on a routine basis by personnel within the Office of Forensic Sciences, in accordance with their professional duties and responsibilities.

Michael Kennedy
Michael Kennedy
Director
NJSP Office of Forensic Sciences

Sworn to and subscribed before me this 07 day of July, 2024.

Notary

KAREN E. STAHL
NOTARY PUBLIC OF NEW JERSEY
Commission # 50110522
My Commission Expires 8/13/2024

KAREN E. STAHL
NOTARY PUBLIC OF NEW JERSEY
Commission # 50110522



"An Internationally Accredited Agency"

New Jersey Is An Equal Opportunity Employer
Printed on Recycled Paper and Recyclable





CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
 7256 S SAM HOUSTON PKWY W
 STE 100
 HOUSTON, TX 77055
 PO Number: SUC4303700802



Certificate/SO Number: 5-F8B2G-420-1 Revision 0

As Found/As Left Data

| Description | Setpoints | Accuracy | Low Limit | High Limit | As Found / As Left | O C T | Cal Process Uncertainty (k=2; s) | Measurement Uncertainty (k=2; s) | Units | TUR |
|---|-----------|------------|-----------|------------|--------------------|-------------|--|--|-------|-------|
| Function Checks | | | | | | | | | | |
| Bubble Check | | | P | P | P | | | | | |
| Seal Check | | | P | P | P | | | | | |
| Temperature Source: Accuracy Test | | | | | | | | | | |
| Accuracy Test | 31.00°C | ±(0.02 °C) | 33.00 | 31.02 | 31.01 °C | | 1.6e-002 | 1.6e-002 | °C | 1.3:1 |
| Temperature Source: Stability Test | | | | | | | | | | |
| Stability Test | 0.00°C | ±(0.02 °C) | -0.02 | 0.02 | 0.00 °C | | 1.5e-002 | 1.6e-002 | °C | 1.3:1 |

Field not applicable.

Traceable Standards

| Asset | Manufacturer | Model Number | Description | Cal Date | Due Date | Traceability Number | Use |
|----------|-----------------------|--------------|-------------------|-----------|-----------|---------------------|-------|
| 5541475 | AccuMac Corporation | AM1750-12-S | Secondary SPRT | 12-Aug-24 | 31-Aug-25 | H52KM4-1 | AF/AL |
| HP027312 | Hart Scientific/Fluke | 1575 | Super Thermometer | 10-Jul-24 | 31-Jan-25 | 5-81P/27312-S-1 | AF/AL |

The use of the standard is defined as: AF - used for as-found readings, AL - used for as-left readings.

Environmental Data

| Temperature | Relative Humidity | Temp / RH Asset | Lab Area | Lab Description |
|-------------------|-------------------|-----------------|----------|-----------------|
| 69.80°F / 21.00°C | 56.00% | DewK11 | G | Temperature |

Decision Rule

When compliance statements are present, they are reported without factoring in the effects of uncertainty and comply with the guidelines as follows: The acceptance zone is defined as: less than or equal to the high limit, and/or greater than or equal to the low limit. The rejection zones are defined as greater than the high limit and/or less than the low limit. Single measurement results in the acceptance zone.

Date Received: August 09, 2025
 Service Level: R2

Certificate - Page 2 of 5
 Reprinted on December 03, 2025

Customer Number: 1-650111-000
 CP3-F20 014R11 07/27/23 FPO1RD 4/9/2021

CALIBRATED BY TRANSCOT CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77065
PO Number: SUC4303700862



Certificate/SO Number: 5-F8B2G-420-1 Revision 0

are identified as in-tolerance. Single measurement results in the rejection zone are identified as out-of-tolerance (OOT). When all measurement results are in the acceptance zone for repeated measurements, for the same characteristic, the test is identified as in-tolerance. For repeated characteristic measurements, a single measurement result in the rejection zone, will cause the test to be identified as out-of-tolerance (OOT). Data rejection for cause, (outliers) is permitted after the "Determining and Verifying Out of Tolerance (OOT) and/or Op Fail Readings" procedure outlined in this document has been completed and the anomalous reading cannot be repeated, and the anomalous reading does not represent the system under test. Statements of conformity are binary.

CALIBRATED BY **TRANSAT** **CERTIFICATE OF CALIBRATION**

Customer: DRAEGER INC
 7256 S SAM HOUSTON PKWY W
 STE 100
 HOUSTON, TX 77005
 PO Number: SUC4303701052



Certificate/SO Number: 5-F8B2G-420-1 Revision 0

| Legend | |
|-------------------------------|--|
| Topic | Description |
| Accuracy | UUT specification that establishes expected tolerances and a time limit (calibration interval) over which the instrument is expected to hold these tolerances |
| As Found | Initial measurement results |
| As Left | Measurement results after adjustment and/or repair |
| Blank Data Field | Test is not applicable for the UUT |
| Cal Process Uncertainty (CPU) | The uncertainty of calibration process for the reported measurement result |
| Calibration Date | Indicates the date that the calibration was completed |
| Cover Factor (k) | A measure of uncertainty that defines an interval about the measurement result |
| Due Date | Indicates the end of the calibration cycle as requested by the customer |
| Issue Date | Indicates the date that the calibration has passed the Data Review Process and was signed by an authorized signatory or the date that a revision to the original certificate has been issued |
| Low / High Limits | Establishes UUT acceptable performance limits for the test measurement |
| Measurement Uncertainty | The dispersion of the values attributed to a measured quantity |
| OOA | Out of Acceptance (#) |
| OOT | Out of Tolerance (%) |
| Setpoints | Measurement target values |
| Traceability | Unbroken chain of comparisons relating an instrument's measurements to a known standard(s) |
| Traceability Number | Unique identifier(s) used to document traceability of calibration standards |
| TUR | Test Uncertainty Ratio, ratio of the tolerance or specification of the test measurement in relation to the uncertainty in measurement results |
| UUT | Unit Under test |

CALIBRATED BY TRANSCAT CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77065
PO Number: SUC430370062



Certificate/SO Number: 5-F8B2G-420-1 Revision 0

Calibrated At:
18115 Park Row
Houston, TX 77054


Facility Representative:
16110 Park Row
Houston, TX 77084
800-828-1470

Calibrated By:
Electronically Signed By:
Jose Martinez

José Martínez Aug 16, 2015
Calibration Technician 14:06:01 -04:00

Reviewed By:
Electronically Signed By:
David Reights for

Josh Solaou Aug 16, 2015
Lab Manager 18:53:45 -04:00

Unit Barcode: 
0000041633

Date Received: August 08, 2015
Service Level: RU

Certificate - Page 5 of 5
Revised on December 03, 2015

Customer Number: 1-608111-000
CPLD 1/20 014R11 07/27/20 FPO0102 4/16/2011

CALIBRATED
BY **TRANSCAT**

CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUC4303700862



Certificate/SO Number: 5-F8B2G-40-1 Revision 0

Manufacturer: Mensor Corp
Model Number: CPG2300
Description: Portable Barometer
Serial Number: 41001275
ID: NONE

As-Found: Out Of Tolerance
As-Left: In Tolerance

Issue Date: Aug 25, 2025
Calibration Date: Aug 23, 2025
Due Date: Aug 23, 2026

Calibrated To: Manufacturer Specification
Calibration Procedure: 1-AC107288-0

Transcat Calibration Laboratories have been audited and found in compliance with ISO/IEC 17025:2017. Accredited calibrations performed within the Lab Scope of Accreditation are indicated by the presence of the Accrediting Body Logo and Certificate Number. Any measurements on an accredited calibration not covered by the Lab Scope of Accreditation are listed in the notes section of the certificate. SCC, NRC, CLAS or ANAB do not guarantee the accuracy of an individual calibration by accredited laboratories.

Transcat calibrations, as applicable, are performed in compliance with the requirements of the Transcat Quality Manual QAC-P01-000, the customer Purchase Order and/or Quality Agreement requirements, ISO 9001:2015, ANSI/NCSL Z540-1-1994 (R2002), and ISO 10012:2003, as applicable. When specified contractually, the requirements of ISO TS 16949:2009, 10CFR21, 10CFR50 App. B, ASME NQA-1:2012, and ANSI/NCSL Z540.3-2006 (R2010) are also covered.

Complete records of work performed are maintained by Transcat and are available for inspection. Laboratory standards used in the performance of this calibration are listed on this certificate.

Transcat documents the traceability of measurements to the SI units through the National Institute of Standards and Technology (NIST), or the National Research Council of Canada (NRC), or other national measurement institutes (NMI) that are signatories to the GIPM Mutual Recognition Arrangement, or accepted fundamental and/or natural physical constants, or by the use of specified methods, consensus standards or ratio type measurements. Documentation supporting traceability information is available for review upon written request at a Transcat facility. The measured quantity and the measurement uncertainty are required for further dissemination of traceability.

Uncertainties are reported with a coverage factor $k=2$, providing a level of confidence of approximately 95%. All calibrations have been performed using processes having a TUR of 4:1 or better (3:1 for mass calibrations), unless otherwise noted. The Test Uncertainty Ratio (TUR) is calculated in accordance with NCSL International RP-18. For mass calibrations: Conventional mass referenced to 8.0 g/cm³.

The results in this report relate only to the item calibrated or tested. Recorded calibration data is valid at the time of calibration within the stated uncertainties at the environmental conditions noted. The determination of compliance to the specification is specific to the model/serial no./ID no. referenced above based on the tolerances shown; these tolerances are either the original equipment manufacturers (OEM's) warranted specifications or the client's requested specifications. Any number of factors can cause a unit to drift out of tolerance at any time following its calibration. Limitations on the uses of this instrument are detailed in the OEM's operating instructions. This certificate may not be reproduced except in full, without the written approval of Transcat. Additional information, if applicable may be included on separate report(s).

Notes:

Unit received out of tolerance. Adjustments were made to meet customer specs.

The OOT readings were verified.

Date Received: August 08, 2025
Service Level: R9

Certificate - Page 1 of 6
Reprinted on August 27, 2025

Customer Number: 1-650111-000
OPB-F20-014R11 07/27/23 FPD01R9 4/6/2021



CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
 7256 S SAM HOUSTON PKWY W
 STE 100
 HOUSTON, TX 77065
 PO Number: SUC4303700862



Certificate/SO Number: 5-F8B2G-40-1 Revision 0

As Found Data

| Description | Setpoints | Accuracy | Low Limit | High Limit | As Found | Q O T | Cal Process Uncertainty (k=2: ±) | Measurement Uncertainty (k=2: ±) | Units | TUR |
|---|--------------|--------------|-----------|------------|--------------|-------------|--|--|-------|----------|
| Pressure Measure: 552 to 1172 mbara Range | | | | | | | | | | |
| | 550.07mbara | ±(0.015% FS) | 549.9 | 550.3 | 549.7 mbara | * | 1.0e-002 | 6.1e-002 | mbara | 19.1 : 1 |
| | 610.01mbara | ±(0.015% FS) | 609.6 | 610.2 | 609.7 mbara | * | 1.2e-002 | 5.9e-002 | mbara | 17.3 : 1 |
| | 680.06mbara | ±(0.015% FS) | 680.2 | 680.6 | 680.0 mbara | * | 1.3e-002 | 5.9e-002 | mbara | 15.5 : 1 |
| | 734.28mbara | ±(0.015% FS) | 734.1 | 734.5 | 733.9 mbara | * | 1.4e-002 | 5.9e-002 | mbara | 14.3 : 1 |
| | 804.64mbara | ±(0.015% FS) | 804.4 | 804.8 | 804.3 mbara | * | 1.5e-002 | 6.0e-002 | mbara | 13.1 : 1 |
| | 864.92mbara | ±(0.015% FS) | 864.7 | 865.1 | 864.6 mbara | * | 1.6e-002 | 6.0e-002 | mbara | 12.2 : 1 |
| | 924.92mbara | ±(0.015% FS) | 924.7 | 925.1 | 924.6 mbara | * | 1.6e-002 | 6.0e-002 | mbara | 11.4 : 1 |
| | 985.22mbara | ±(0.015% FS) | 985.0 | 985.4 | 984.9 mbara | * | 1.9e-002 | 6.1e-002 | mbara | 10.7 : 1 |
| | 1043.85mbara | ±(0.015% FS) | 1043.7 | 1044.1 | 1043.5 mbara | * | 2.0e-002 | 6.1e-002 | mbara | 10.1 : 1 |
| | 1114.20mbara | ±(0.015% FS) | 1114.0 | 1114.4 | 1113.8 mbara | * | 2.1e-002 | 6.1e-002 | mbara | 9.4 : 1 |
| | 1174.56mbara | ±(0.015% FS) | 1174.4 | 1174.8 | 1174.2 mbara | * | 2.2e-002 | 6.2e-002 | mbara | 9.0 : 1 |
| | 924.92mbara | ±(0.015% FS) | 924.7 | 925.1 | 924.6 mbara | * | 1.6e-002 | 6.0e-002 | mbara | 11.4 : 1 |
| | 864.92mbara | ±(0.015% FS) | 864.7 | 865.1 | 864.6 mbara | * | 1.6e-002 | 6.0e-002 | mbara | 12.2 : 1 |
| | 804.64mbara | ±(0.015% FS) | 804.4 | 804.8 | 804.3 mbara | * | 1.5e-002 | 6.0e-002 | mbara | 13.1 : 1 |

Date Received: August 08, 2025
 Service Level: R9

Certificate - Page 2 of 6
 Reprinted on August 27, 2025

Customer Number: 1-659111-000
 OPS-F20-014R11 07/27/23 FP001R9 4/9/2021



CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
 7256 S SAM HOUSTON PKWY W
 STE 100
 HOUSTON, TX 77065
 PO Number: SUC4303700862



Certificate/SO Number: 5-F8B2G-40-1 Revision 0

As Left Data

| Description | Setpoints | Accuracy | Low Limit | High Limit | As Left | O O T | Cal Process Uncertainty (k=2; ±) | Measurement Uncertainty (k=2; ±) | Units | TUR |
|---|--------------|--------------|-----------|------------|--------------|-------------|--|--|-------|----------|
| Pressure Measure: 552 to 1172 mbara Range | | | | | | | | | | |
| | 550.07mbara | ±(0.015% FS) | 549.9 | 550.3 | 550.1 mbara | | 1.0e-002 | 6.1e-002 | mbara | 19.1 : 1 |
| | 610.01mbara | ±(0.015% FS) | 609.8 | 610.2 | 610.1 mbara | | 1.2e-002 | 5.9e-002 | mbara | 17.3 : 1 |
| | 680.37mbara | ±(0.015% FS) | 680.2 | 680.6 | 680.4 mbara | | 1.3e-002 | 5.9e-002 | mbara | 15.6 : 1 |
| | 734.27mbara | ±(0.015% FS) | 734.1 | 734.5 | 734.3 mbara | | 1.4e-002 | 5.9e-002 | mbara | 14.3 : 1 |
| | 804.64mbara | ±(0.015% FS) | 804.4 | 804.8 | 804.7 mbara | | 1.5e-002 | 6.0e-002 | mbara | 13.1 : 1 |
| | 864.91mbara | ±(0.015% FS) | 864.7 | 865.1 | 865.0 mbara | | 1.6e-002 | 6.0e-002 | mbara | 12.2 : 1 |
| | 924.91mbara | ±(0.015% FS) | 924.7 | 925.1 | 925.0 mbara | | 1.6e-002 | 6.0e-002 | mbara | 11.4 : 1 |
| | 985.21mbara | ±(0.015% FS) | 985.0 | 985.4 | 985.3 mbara | | 1.9e-002 | 6.1e-002 | mbara | 10.7 : 1 |
| | 1043.84mbara | ±(0.015% FS) | 1043.6 | 1044.0 | 1043.9 mbara | | 2.0e-002 | 6.1e-002 | mbara | 10.1 : 1 |
| | 1114.19mbara | ±(0.015% FS) | 1114.0 | 1114.4 | 1114.2 mbara | | 2.1e-002 | 6.1e-002 | mbara | 9.4 : 1 |
| | 1174.55mbara | ±(0.015% FS) | 1174.4 | 1174.8 | 1174.6 mbara | | 2.2e-002 | 6.2e-002 | mbara | 9.0 : 1 |
| | 924.91mbara | ±(0.015% FS) | 924.7 | 925.1 | 925.0 mbara | | 1.6e-002 | 6.0e-002 | mbara | 11.4 : 1 |
| | 864.91mbara | ±(0.015% FS) | 864.7 | 865.1 | 865.0 mbara | | 1.6e-002 | 6.0e-002 | mbara | 12.2 : 1 |
| | 804.63mbara | ±(0.015% FS) | 804.4 | 804.8 | 804.7 mbara | | 1.5e-002 | 6.0e-002 | mbara | 13.1 : 1 |

Field not applicable.

Traceable Standards

| Asset | Manufacturer | Model Number | Description | Cal Date | Due Date | Traceability Number | Use |
|----------|----------------------|--------------------|----------------------------|-----------|-----------|---------------------|-------|
| DW11BA | Fluke/DH Instruments | PG7601 | Piston Gauge | 31-Jul-25 | 31-Jul-26 | 5-&DW11BA-20-1 | AF/AL |
| DW11CA | Fluke/DH Instruments | MS-AMH-38 | AMH Mass Set | 5-Jun-25 | 30-Sep-25 | 5-&DW11CA-40-1 | AF/AL |
| DW11LOW | Fluke/DH Instruments | PC-7100/7600-10-TC | Gas Piston-Cylinder Module | 8-Apr-22 | 30-Apr-27 | 5-&DW11LOW-3-1 | AF/AL |
| DW11MASS | Fluke/DH Instruments | MS-AMH-38 | AMH Mass Set | 5-Mar-25 | 31-Mar-26 | 5-&DW11MASS-12-1 | AF/AL |

The use of the standard is defined as: AF - used for as-found readings, AL - used for as-left readings.

Date Received: August 08, 2025
 Service Level: R3

Certificate - Page 3 of 6
 Reprinted on August 27, 2025

Customer Number: 1-659111-000
 OPS-F20-014R11 07/27/23 FP001R0 4/8/2021



CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
 7256 S SAM HOUSTON PKWY W
 STE 100
 HOUSTON, TX 77085
 PO Number: SUC4303700862



Certificate/SO Number: 5-F8B2G-40-1 Revision 0

Environmental Data

| Temperature | Relative Humidity | Temp / RH Asset | Lab Area | Lab Description |
|------------------|-------------------|-----------------|----------|-----------------|
| 73.10°F /22.83°C | 43.00% | DewK9 | B | GP Pressure |

Decision Rule

When compliance statements are present, they are reported without factoring in the effects of uncertainty and comply with the guidelines as follows : The acceptance zone is defined as: less than or equal to the high limit, and/or greater than or equal to the low limit. The rejection zones are defined as greater than the high limit and/or less than the low limit. Single measurement results in the acceptance zone are identified as in-tolerance. Single measurement results in the rejection zone are identified as out-of-tolerance (OOT). When all measurement results are in the acceptance zone for repeated measurements, for the same characteristic, the test is identified as in-tolerance. For repeated characteristic measurements, a single measurement result in the rejection zone, will cause the test to be identified as out-of-tolerance (OOT). Data rejection for cause, (outliers) is permitted after the "Determining and Verifying Out Of Tolerance (OOT) and/or Op Fail Readings" procedure outlined in this document has been completed and the anomalous reading cannot be repeated, and the anomalous reading does not represent the system under test. Statements of conformity are binary.



CERTIFICATE OF CALIBRATION

Customer: DRAEGER INC
 7256 S SAM HOUSTON PKWY W
 STE 100
 HOUSTON, TX 77065
 PO Number: SUC4303700862



Certificate/SO Number: 5-F8B2G-40-1 Revision 0

Legend

| Topic | Description |
|-------------------------------|--|
| Accuracy | UUT specification that establishes expected tolerances and a time limit (calibration interval) over which the instrument is expected to hold these tolerances |
| As Found | Initial measurement results |
| As Left | Measurement results after adjustment and/or repair |
| Blank Data Field | Test is not applicable for the UUT |
| Cal Process Uncertainty (CPU) | The uncertainty of calibration process for the reported measurement result |
| Calibration Date | Indicates the date that the calibration was completed |
| Cover Factor (k) | A measure of uncertainty that defines an interval about the measurement result |
| Due Date | Indicates the end of the calibration cycle as requested by the customer |
| Issue Date | Indicates the date that the calibration has passed the Data Review Process and was signed by an authorized signatory or the date that a revision to the original certificate has been issued |
| Low / High Limits | Establishes UUT acceptable performance limits for the test measurement |
| Measurement Uncertainty | The dispersion of the values attributed to a measured quantity |
| OOA | Out of Acceptance (#) |
| OOT | Out of Tolerance (*) |
| Setpoints | Measurement target values |
| Traceability | Unbroken chain of comparisons relating an instrument's measurements to a known standard(s) |
| Traceability Number | Unique identifier(s) used to document traceability of calibration standards |
| TUR | Test Uncertainty Ratio, ratio of the tolerance or specification of the test measurement in relation to the uncertainty in measurement results |
| UUT | Unit Under test |

CALIBRATED
BY **TRANSOT**

CERTIFICATE OF CALIBRATION


Customer: DRAEGER INC
7256 S SAM HOUSTON PKWY W
STE 100
HOUSTON, TX 77085
PO Number: SUC4303700862




Certificate/SO Number: 5-F8B2G-40-1 Revision 0

Calibrated At:
16115 Park Row
Houston, TX 77084

Facility Responsible:
16115 Park Row
Houston, TX 77084
800-828-1470

Calibrated By:
 Electronically Signed By:
Alex Spiker

Reviewed By:
 Electronically Signed By:
Graham Walker for

Alex Spiker Aug 28, 2025
Calibration Technician 20:24:59 -04:00

Josh Soltesu Aug 28, 2025
Lab Manager 08:31:52 -04:00

Unit Barcode: 
0900B420643

Date Received: August 08, 2025
Service Level: R9

Certificate - Page 6 of 6
Reprinted on August 27, 2025

Customer Number: 1-659111-000
OPS-F20-014R11 07/27/23 FPO01R9 4/9/2021

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

DEPT OF LAW AND PUBLIC SAETY

Sales order: 1120654933

Date: May 30, 2023

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater.
CALGAZ LOT#: 302-402755160
ETHANOL IN NITROGEN

Product Expiration: May 24, 2026

| COMPONENT | PPM | (BrAC) |
|--------------------------|----------|----------|
| ETHANOL | 260.5PPM | (0.100) |
| NITROGEN | BAL | |
| AVERAGE ANALYTICAL VALUE | PPM | (BrAC) |
| ETHANOL | 261.6 | (0.100) |

| REFERENCE STANDARD | CYLINDER | CONCENTRATION PPM |
|-----------------------------|----------|-------------------|
| N.M.I. TRACEABLE STANDARDS* | ND38424 | 260.7 |

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS.

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329


No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: May 24, 2023

APPROVED BY: _____

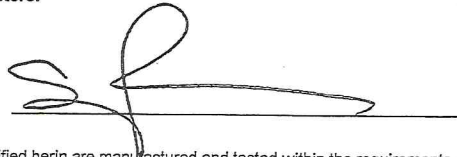

"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC

821 Chesapeake Drive, Cambridge, MD 21613-0149

Phone: (410) 228-6400

Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

DEPT OF LAW AND PUBLIC SAFETY

Sales order: 1120656707
Date: May 30, 2023

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
 ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater:
 CALGAZ LOT#: 302-402730318
 ETHANOL IN NITROGEN
 Product Expiration: April 27, 2026

| COMPONENT | PPM | (BrAC) |
|--------------------------|-----------|----------|
| ETHANOL | 104.2 PPM | (0.040) |
| NITROGEN | BAL | |
| AVERAGE ANALYTICAL VALUE | PPM | (BrAC) |
| ETHANOL | 107.8 | (0.041) |

| REFERENCE STANDARD | CYLINDER | CONCENTRATION PPM |
|-----------------------------|----------|-------------------|
| N.M.I. TRACEABLE STANDARDS* | ND38424 | 260.7 |

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS:
 TRACEABILITY
 Preparation:
 Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company, using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.
 Traceable certificate numbers 3445312 and 3398673.

Analytical:
 Analytical Instruments Calibrated Using NMI Traceable Standards.
 Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.
 *NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).
 CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: April 27, 2023

APPROVED BY: 

"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
 821 Chesapeake Drive, Cambridge, MD 21613-0149
 Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Sales order: 1120656618

Date: May 25, 2023

DEPT OF LAW AND PUBLIC SAFETY

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater.
CALGAZ LOT#: 302-402732434
ETHANOL IN NITROGEN

Product Expiration: April 28, 2026

| COMPONENT | PPM | (BrAC) |
|--------------------------|----------|----------|
| ETHANOL | 208.4PPM | (0.080) |
| NITROGEN | BAL | |
| AVERAGE ANALYTICAL VALUE | PPM | (BrAC) |
| ETHANOL | 210.4 | (0.081) |

| REFERENCE STANDARD | CYLINDER | CONCENTRATION PPM |
|-----------------------------|----------|-------------------|
| N.M.I. TRACEABLE STANDARDS* | ND38424 | 260.7 |

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329


No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: April 28, 2023

APPROVED BY:

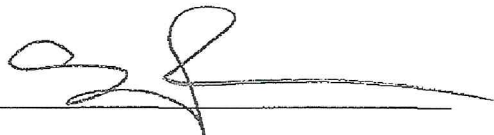

"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Part Number: 4401040NJ
DRAEGER MEDICAL SYSTEMS INC

Sales order: 1126209454
Date: December 18, 2023

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater.
CALGAZ LOT#: 302-402922401
ETHANOL IN NITROGEN

Product Expiration: December 14, 2026

| COMPONENT | PPM | (BrAC) |
|--------------------------|----------|----------|
| ETHANOL | 416.8PPM | (0.160) |
| NITROGEN | BAL | |
| AVERAGE ANALYTICAL VALUE | PPM | (BrAC) |
| ETHANOL | 418.6 | (0.161) |

| REFERENCE STANDARD | CYLINDER | CONCENTRATION PPM |
|-----------------------------|----------|-------------------|
| N.M.I. TRACEABLE STANDARDS* | ND38424 | 260.7 |

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329


No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: December 14, 2023

APPROVED BY: _____

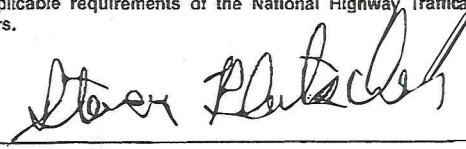

"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

CERTIFICATE OF ANALYSIS

EBS - ETHANOL BREATH STANDARD

Sales order: 1120654720
Date: May 30, 2023

DEPT OF LAW AND PUBLIC SAFETY

METHOD OF ANALYSIS: IR Breath Alcohol Analyzer
ANALYTICAL ACCURACY: +/-0.002 BrAC or +/-2% whichever is greater.
CALGAZ LOT#: 302-402755077
ETHANOL IN NITROGEN

Product Expiration: May 26, 2026

| COMPONENT | PPM | (BrAC) |
|--------------------------|----------|----------|
| ETHANOL | 781.5PPM | (0.300) |
| NITROGEN | BAL | |
| AVERAGE ANALYTICAL VALUE | PPM | (BrAC) |
| ETHANOL | 794.4 | (0.305) |

| REFERENCE STANDARD | CYLINDER | CONCENTRATION PPM |
|-----------------------------|----------|-------------------|
| N.M.I. TRACEABLE STANDARDS* | ND38424 | 260.7 |

* CERTIFICATION TRACEABLE TO NATIONAL METROLOGY INSTITUTE TRACEABLE STANDARDS

TRACEABILITY

Preparation:

Gas mixtures manufactured with balances calibrated by an ISO 17025 accredited company using NIST traceable weights and meets or exceeds the requirements of NIST Handbook 44.

Traceable certificate numbers 3445312 and 3398673.

Analytical:

Analytical Instruments Calibrated Using NMI Traceable Standards.

Certification Numbers: A679-20190918, D049803-20220329

No effecting environmental conditions during analysis.

*NMI is recognized by NIST through the Mutual Recognition Agreement (CIPM MRA).

CALGAZ calibration devices were found to meet all applicable requirements of the National Highway Traffic Safety Administration Model Specifications for calibrating units for breath alcohol testers.

Manufactured Date: May 26, 2023

APPROVED BY:



"We certify that all the cylinders for the Lot numbers identified herein are manufactured and tested within the requirements of CFR 49 part 178.65 and that physical and chemical test reports are on file and copies will be furnished upon request."

CALGAZ, a division of Airgas USA LLC
821 Chesapeake Drive, Cambridge, MD 21613-0149
Phone: (410) 228-6400 Fax: (410) 228-4251

DEPARTMENT OF
Traffic and Public Safety
This is to certify that

David M. Bellay

New Jersey State Police

IS QUALIFIED AND COMPETENT TO CONDUCT CHEMICAL BREATH ANALYSES PURSUANT TO CHAPTER 142 OF

THE LAWS OF 1964 IN THE OPERATION OF THE Alcotest 9510

A METHOD TO DETERMINE INTOXICATION

GIVEN UNDER MY HAND AT TRENTON, NEW JERSEY THIS 28th DAY OF April

TWO THIRTYEIGHT AND Twenty Three

David M. Bellay
COLONEL
NEW JERSEY STATE POLICE

W. J. Bell
ATTORNEY GENERAL
STATE OF NEW JERSEY

ORIGINAL COURSE DATES

| | DATE | Refresher Course PLACE | INSTRUCTOR |
|----|---------|---------------------------|------------|
| 1. | 3-27-25 | MCFA | A. G. |
| 2. | | | |
| 3. | | | |
| 4. | | | |
| 5. | | | |
| 6. | | | |
| 7. | | | |
| 8. | | | |
| 9. | | | |

S.P. 293B (Rev. 10/22)

DEPARTMENT OF
Traffic and Public Safety
This is to certify that

David M. Bellay

Breath Test Coordinator/Instructor

IS QUALIFIED AND COMPETENT TO CONDUCT CHEMICAL BREATH ANALYSES PURSUANT TO CHAPTER 142 OF

THE LAWS OF 1964 IN THE OPERATION OF THE Alcotest 9510

A METHOD TO DETERMINE INTOXICATION

GIVEN UNDER MY HAND AT TRENTON, NEW JERSEY THIS 20th DAY OF August

TWO THIRTY AND Twenty Four

David M. Bellay
COLONEL
NEW JERSEY STATE POLICE

W. J. Bell
ATTORNEY GENERAL
STATE OF NEW JERSEY

ORIGINAL COURSE DATES

| | DATE | Refresher Course PLACE | INSTRUCTOR |
|----|------|---------------------------|------------|
| 1. | | | |
| 2. | | | |
| 3. | | | |
| 4. | | | |
| 5. | | | |
| 6. | | | |
| 7. | | | |
| 8. | | | |
| 9. | | | |

S.P. 293B (Rev. 10/22)